

SPECIFICATION

TECHNICAL DATA SHEET

3000W Stack Battery Pack



CET-DYB3000

1 > General Performance

◇ 3000W Smart extra battery, for capacity expansion, and can support the superposition of 6 battery packs at most.

◇ Support Wi-Fi & Bluetooth

◇ Battery: standard charger; solar photovoltaic panel charging. Battery capacity: 3168Wh

◇ Output Ports: AC Output Port, USB Output Port, USB-C Output Port, Car port/DC5525/Anderson.

◇ UPS function: When after the power grid is suddenly cut off, this product can automatically switch to the battery power supply mode of this product within 15ms. It is recommended to use only one device during use rather than multiple devices at the same time to avoid overload protection.

2 > Product Specification

Output		
Car port/DC5525/Anderson output	Rated Voltage	12V
	Rated Current	10A
	Power	120W (MAX)
USB-A (Output*2)	Rated Voltage- Current	5V-2.4A
	Power	12W (MAX)
USB-A (Output*2)	Rated Voltage- Current	5V-3A,9V-2A,12V-1.5A
	Power	36W (MAX)
USB-C (Output*1)	Rated Voltage- Current	5V/9V/15V-3A,20V-5A
	Power	200W(MAX)
Input		
AC Input	Rated Voltage	100-120V
	Rated Current	15A
	Power	1500W(MAX)
	Rated Voltage	220-240V
	Rated Current	10A
	Power	2000W(MAX)
Battery		
Rated Capacity		3168Wh
Battery Cell Type		Lithium iron phosphate (LiFePO4)
Protection system	High temperature protection,low temperature protection,over discharge protection,over charge protection,overload protection,short circuit protection,over current protection	
General		
Storage Enviroment		14°F -104°F
Working Temperature		14°F -104°F
Product Size		530*360*345mm
Product Net weight		39.5kg
Certificates		1.CE 2.UL 3.PSE 4.UKCA 5.FCC 6.RoHS 7.UN38.3 8.MSDS



Camel Electronic Technology Co., Ltd


For reference only, the actual product specifications prevail.

SPECIFICATION

TECHNICAL DATA SHEET


3 > Product Introduction

3.1 Appearance introduction

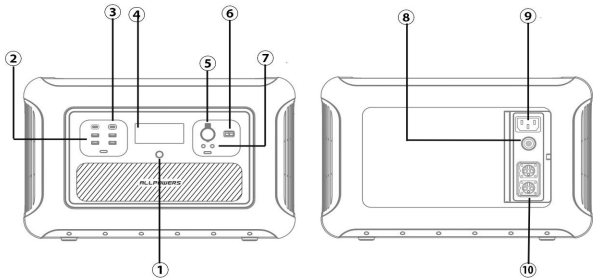

- 1. Power On/Off
- 2. USB-A Output *4
- 3. USB-C Output *2
- 4. LED Display
- 5. Car Port Output
- 6. Anderson Output
- 7. DC Output
- 8. Overload protector
- 9. AC Input
- 10. Extra Battery Connector

3.2 Introduction of diaplay icon




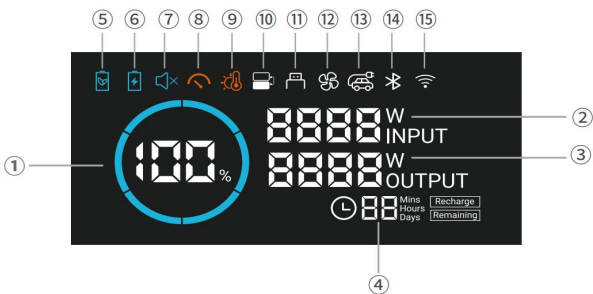


- 1. Percentage of charge
- 2. The number of input power
- 3. The number of output power
- 4. Time remaining, fault code
- 5. Power saving mode icon
- 6. Fast charge mode icon
- 7. Mute mode icon
- 8. Output overload icon
- 9. High temperature warning mark
- 10. Battery pack merge icon
- 11. DC indicates the icon
- 12. Fab operating ID
- 13. Car charge output icon
- 14. Bluetooth connection icon
- 15. Wifi connection icon

4 > Packing Information

3000W Stack Battery Pack×1
Parallel connection cable x1

AC Charging Cable ×1
User Manual and warranty card x 1



Item	Quantity	G.W / CTN	Carton Size
CET-DYB3000	1 PCS/CTN	42.5kg	61.2*45*45cm

5 > Warranty (1-Year-Limited)

The manufacturer's warranty is void under the following circumstances but not limited to:

- ◇ The appearance of the product is damaged after use;
- ◇ Product performance failure caused by human factors.
- ◇ Disassembly and repair by non staff members without permission;
- ◇ Damage caused by irresistible factors such as natural disasters, lightning and accidents.

6 > Company Information

Camel Electronic Technology Co., Ltd.

Add: No. 40, Dajinzhong Road, Baiyun District, Guangzhou City, Guangdong Province, CN 551040

Tel&WhatsApp: +86-13922158739

Email: info@camelet.com

Linkedin:linkedin.com/in/艾李-5b24a1ba

Official Website: <http://www.camelet.com>



Camel Electronic Technology Co., Ltd

For reference only, the actual product specifications prevail.