

SPECIFICATION

TECHNICAL DATA SHEET

200W Outdoor Power Supply



CET-DY200

1 > General Performance

- ◇ All in one - outdoor power station
- ◇ Battery capacity:30400mAh(112.48Wh)
- ◇ Charging methods: type-c fast charge input,16.8V-1.5A charging input.
- ◇ Output Ports:USB Output 5V/9V/2.0A 12V/1.5A 5V/2.0A,AC inverter switch,AC220V Output socket
- ◇ LED lighting:strong lighting,flashing,SOS rescue;220V working LED:green light:working normally,red light:1.Overload protection 2.Over temperature protection 3.Short circuit protection 4.Over-discharge protection.


2 > Product Specification

Output		
AC Output	Rated Voltage	220V
	Rated Power	200W
	Frequency	50Hz
USB-A Output	Rated Voltage	5V
	Rated Current	2A
USB-B Output	Rated Voltage	5V/9V
	Rated Current	2A
	Rated Voltage	12V
	Rated Current	1.5A
LED Lighting	LED lights are divided into three gears,strong lighting,flashing,SOS rescue,long press for strong lighting,In Click Pop,in Click SOS rescue,In Press Stop or long press to stop.	
220V working LED	Green light:working normally, red light:1.Overload protection 2.Over temperature protection 3.Short circuit protection 4.Over-discharge protection.	
Input		
TYPE-C Input	Rated Voltage	5V/9V
	Rated Current	2A
	Rated Voltage	12V
	Rated Current	1.5A
DC3.5 Input	Rated Voltage	16.8V
	Rated Current	1.5A
Battery		
Rated Capacity		112Wh
Battery Cell Type		Ternary lithium battery
Charging Time		About 5 hours
General		
Storage Enviroment		—4°F -140°F
Working Temperature		32°F -113°F
Product Size		240*88*88mm
Product Net weight		1.4kg
Certificates		1.CE 2.FCC 3.UL 4.RoHS 5.PSE 6.UN38.3 7.MSDS

SPECIFICATION

TECHNICAL DATA SHEET

3 > Product Introduction

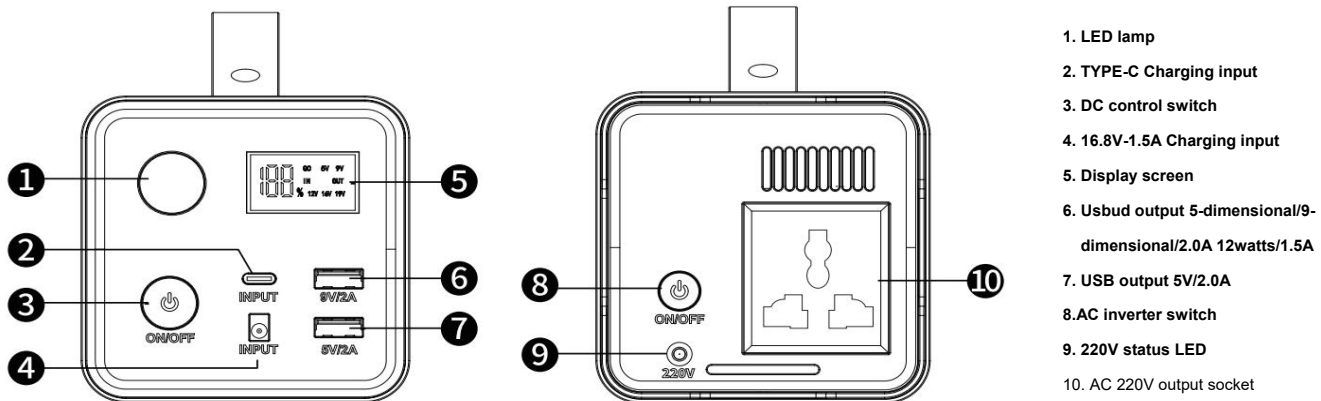

4 > Packing Information



Item	Quantity	G.W / CTN	Carton Size
CET-DY200	6 PCS/CTN	10.5 kg	395*295*430mm

5 > Warranty (1-Year-Limited)

The manufacturer's warranty is void under the following circumstances but not limited to:

- ◇ Improper or inadequate maintenance or modification.
- ◇ Accident, misuse, abuse, contamination, or other external causes.
- ◇ The use of unspecified adapter and accessories.
- ◇ Damages that occurs as a result of one's failure to follow the instructions.

6 > Company Information

Camel Electronic Technology Co., Ltd.

Add: No. 40, Dajinzhong Road, Baiyun District, Guangzhou City, Guangdong Province, CN 551040

Tel&WhatsApp: +86-13922158739

Email: info@camelet.com

Linkedin: linkedin.com/in/艾李-5b24a1ba

Official Website: <http://www.camelet.com>



Camel Electronic Technology Co., Ltd

For reference only, the actual product specifications prevail.